

## Signage Features



Model	B-Line	C-Line 8000	C-Line 6000	Q-Line 3510Q	Q-Line 3550Q	D-Line 4510D	D-Line 4550D	P-Line	H-Line	X-Line	T-Line**
CMND	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CMND&Control	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CMND&Create	✓	✓	✓		✓	✓	✓	✓	✓*	✓*	✓
CMND&Deploy					✓	✓	✓	✓	✓*	✓*	✓
CMND&Calibrate					✓	✓	✓	✓	✓*	✓*	✓
Android	✓		✓		✓	✓	✓	✓	✓*	✓*	✓
Basic Failover				✓	✓						
Full Failover				✓	✓	✓	✓	✓	✓	✓	✓
Clinical D Image				✓	✓	✓	✓	✓	✓	✓	✓
SmartPlayer	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
SmartInsert				✓ (65 above)	✓ (65 above)	✓ (65 above)	✓ (65 above)	✓	✓	✓	✓
SmartPower	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
SmartBrowser	✓	✓	✓		✓	✓	✓		✓	✓	✓
WiFi	✓	✓	✓		✓ (Optional)		✓	✓ (Optional)	✓*	✓*	✓
Memory Cache	✓	✓	✓		✓		✓		✓ (Only 55")	✓*	✓
QuadViewer							✓		✓ (Only 75")		✓
4G/LTE		✓ (Optional)					✓ (Optional)	✓ (Optional)	✓*	✓*	✓ (Optional)
Wireless Screensharing	ChromeCast Built-In	✓	✓		✓ (Optional)		✓ (Optional)				✓
Google Play Store	✓										

\*Requires optional CRD50 OPS module



### Public Venues

Maximize the viewing experience and generate revenue through advertising and promotion.



### Transportation

Guide travellers to their destination by using high visibility displays or interactive touch screens.



### Corporate

Communicate with your employees, welcome visitors, or impress new clients with a large format screen.



### Education

Improve communication with students, faculty, and visitors with everything from digital signage to interactive touchscreens.



### Retail

Upgrade the customer experience and promote your brand with dynamic, eye catching displays.



### Food & Beverage

Quickly communicate your menu or promote specials with attention grabbing digital menu boards.




© 2021 Koninklijke Philips N.V. All rights reserved. Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[philips.com/professionaldisplaysolutions](https://philips.com/professionaldisplaysolutions)

**PHILIPS**

Professional Display Solutions

Signage Displays

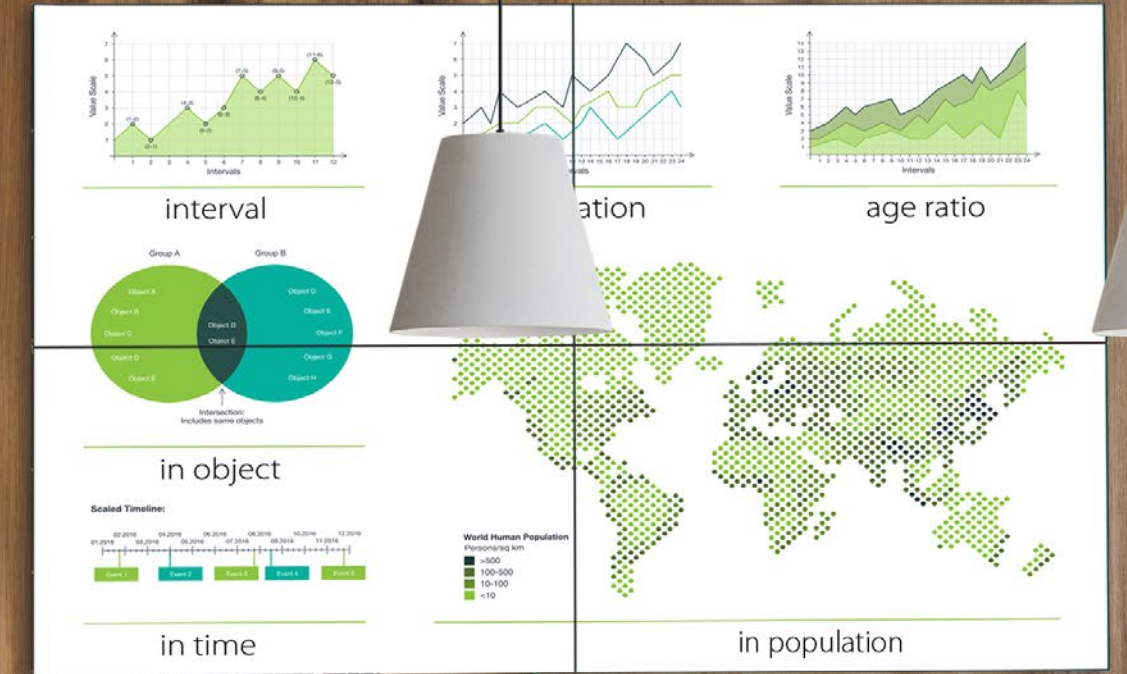

# Inspirational display solutions

## Product Overview 2021 Signage



\*3 year advanced exchange warranty



B-Line



C-Line



H-Line

Model	50BFL2114	58BFL2114	65BFL2114	70BFL2114	75BFL2114	55BDL6051C	65BDL6051C	75BDL6051C	86BDL6051C	65BDL8051C	75BDL8051C	86BDL8051C	55BDL6002H	75BDL3003H	
Screen Size	126 cm (50")	146 cm (58")	164 cm (65")	177 cm (70")	189 cm (75")	138.7 cm (55")	163.9 cm (65")	189.27 cm (75")	217.4 cm (86")	163.9 cm (65")	189.27 cm (75")	217.4 cm (86")	138.7 sm (55")	189.3 cm (75")	
Backlight Type	4K UHD LED					EDGE LED									
Placement	Landscape 18/7					Landscape 18/7									
Resolution	3840x2160p					3840x2160p									
Panel Technology	VA	VA	IPS	VA	IPS	IPS									
Contrast Ratio	5000:1					1200:1									
Dynamic Contrast Ratio	5000:1					500000:1									
Response Time	8 ms					8ms									
Viewing Angles	178/178 degree					178/178 degree									
Display Colors	1.07 Billion					1.07 Billion									
Brightness	350 cd/m <sup>2</sup>					380 cd/m <sup>2</sup>									
Protective Glass						4mm - MOHS 7									
Touch Technology						P-CAP Multitouch									
Touch Points						10									
Power Consumption (EPA)	70W	77W	99W	123W	113W	135W	190W	TBD	300W	190W	TBD	300W	295 W (typ)	382 W (typ)	
Video Input	HDMI (x2), USB				HDMI (x3), USB					DVI, HDMI 2.0 x4, DP 1.2, USB-C					
Video Output	N/A					HDMI									
Audio Input	N/A					Jack 3.5mm									
Audio Output	3.5 mm jack headphone out stereo, 3.5 mm jack mono pre-amp (1.5W 8Ohm)					Jack 3.5mm									
Internal Speaker	2x 10W RMS					2 x 20 W									
External Control	RJ45 (JEDI/JAPIT), RJ48 (Serial Xpress + IR in/out), Crestron/Extron/Neets compatible over IP					RJ45, RS232, IR (in/out) 3.5 mm jack									
Extra Connections	1x RF DVB C/T/T2, CI Slot, 1xUSB 2.0, 1xUSB 3.0, 12V DC out (1.5A)					OPS, USB 3.0, USB 2.0									
Dimensions (WxHxD)	1128x655x81/86 mm	1302 x 760 x 81/86 mm	1464 x 849 x 55/87 mm	1584 x 888 x 66/88 mm	1683 x 966 x 94 mm	1264.4x735.2x96.8mm	1979.1x860.1x101.2mm	1703.8x982x99.7 mm	1949x1120x93.0 mm	1979.1x860.1x101.2mm	1703.8x982x99.7 mm	1949x1120x93.0 mm	1243.2 x 714 x 137.7 mm	1681.2x955.6x142.4 mm	
Bezel Width	(T/L/R) 14.9 mm / (B) 22.0 mm	(T/L/R) 14.9 mm / (B) 22.0 mm	(T/L/R) 14.9 mm / (B) 22.0 mm	(T/L/R) 15.7 mm / (B) 22.0 mm	(T/L/R) 15.2 mm / (B) 20.0 mm	(T/R/L/B) 1.5 mm									
Vesa Mount	200x200 mm, M6	400x300 mm, M6	400x300 mm, M6	400x200 mm, M8	600x400 mm, M8	400x400, M8			600x400, M8			400x400, M8			
Smart Insert Mount	N/A					N/A									
Weight (in KG)	10.4 kg	15.1 kg	20.8 kg	23.4 kg	33.5 kg	33 kg	46.3 kg	69.2 kg	78.2 kg	47.8 kg	70.5 kg	79.5 kg	11.8 kg	65.5 kg	

\*3 year advanced exchange warranty



Q-Line



X-Line

Model	32BDL3510Q	43BDL3510Q	50BDL3510Q	55BDL3510Q	65BDL3510Q	75BDL3510Q	86BDL3510Q	32BDL3550Q	43BDL3550Q	50BDL3550Q	55BDL3550Q	65BDL3550Q	75BDL3550Q	86BDL3550Q	49BDL2005X	55BDL2005X	55BDL1005X	55BDL1007X	55BDL3105X	55BDL3107X					
Screen Size	80 cm (32")	108 cm (42")	125.7 cm (50")	138.7 cm (55")	163.9 cm (65")	189.27 cm (75")	217.4 cm (86")	80 cm (32")	108 cm (42")	125.7 cm (50")	138.7 cm (55")	163.9 cm (65")	189.27 cm (75")	217.4 cm (86")	123.2 cm (49")	138.7 cm (55")	138.7 cm (55")	138.7 cm (55")	138.7 cm (55")	138.7 cm (55")					
Backlight Type	Direct LED															Direct-Lit LED									
Placement	Landscape 18/7, Portrait 18/7															3/2 - 2/2 motion pull down, 3D Comblifer					Landscape (24/7), Portrait (24/7)				
Resolution	1920x1080p	3840x2160p					1920x1080p					3840x2160p					1920x1080p								
Panel Technology	VA	ADS	VA	ADS			VA	ADS	VA	ADS					IPS										
Contrast Ratio	4000:1	1200:1	4000:1	1300:1	1300:1			4000:1	1200:1	4000:1	1300:1					1300:1	1400:1	1200:1	1200:1	1400:1	1200:1				
Dynamic Contrast Ratio	500,000:1															500,000:1					500,000:1				
Response Time	6.5 ms	8 ms	8 ms	9 ms	9 ms	8 ms	8 ms	6.5 ms	8 ms	8 ms	9 ms	9 ms	8 ms	8 ms	8 ms										
Viewing Angles	178/178 degree															178/178 degree					178/178 degree				
Display Colors	16.7 Million	1.07 Billion					16.7 Million					1.07 Billion					16.7 Million								
Brightness	350 cd/m <sup>2</sup>	400 cd/m <sup>2</sup>					350 cd/m <sup>2</sup>					400 cd/m <sup>2</sup>					450 cd/m <sup>2</sup>	500 cd/m <sup>2</sup> /700 cd/m <sup>2</sup>	500 cd/m <sup>2</sup>	700 cd/m <sup>2</sup>	500 cd/m <sup>2</sup>	700 cd/m <sup>2</sup>			
Power Consumption (EPA)	40 W	90 W	105 W	120 W	135 W	150 W	290 W	43 W	88 W	118 W	128 W	157 W	165 W	324 W	110 W	110 W/175 W	175 W	175 W	133W	168W					
Video Input	DVI-I x 1, HDMI (x4), USB, VGA															"VGA, HDMI (2), DVI, DP, Component, Composite, USB, OPS"					"Component (RCA), Composite(RCA), DVI-D, HDMI (x2), VGA (Analog D-Sub), DisplayPort (1.2)"				
Video Output	N/A															VGA (via DVI), DVI, DP, OPS/HDMI (via DVI)					DisplayPort, DVI-I, VGA (via DVI-I)				
Audio Input	3.5 mm jack															3.5 mm jack, Audio Left/Right (RCA)					3.5 mm jack, Audio Left/Right (RCA)				
Audio Output	3.5 mm jack															Audio Left/Right (RCA), External speaker connector					"Audio Left/Right (RCA), External speaker connector"				
Internal Speaker	2x10 W RMS															2x10 W (RMS)					2x10 W (RMS)				
External Control	RJ45, RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack															IR (in/out) 3.5 mm jack, RJ45, RS232C (in/out) 2.5 mm jack					"IR (in/out) 3.5 mm jack, RJ45, RS232C (in/out) 2.5 mm jack"				
Extra Connections	OPS															AC out, OPS					AC out, OPS, RJ45 2-port hub				
Dimensions (WxHxD)	726.5x425.4x69.1	973.0x561.2x63.5	1128.4x649.0x63.5	1241.8x712.6x63.6	1462.3x837.3x68.9	1683.5x961.7x69.5	1929.0x1100.0x69.5	726.5x425.4x69.1	973.0x561.2x63.5	1128.4x649.0x63.5	1241.8x712.6x63.6	1462.3x837.3x68.9	1683.5x961.7x69.5	1929.0x1100.0x69.5	1077.6x607.8x103.8 mm	1213.4x684.2x107.65 mm	1211.4x682.2x98.5 mm	1211.4x682.2x98.5 mm	1211.4x682.2x98.5 mm	1211.4x682.2x98.5 mm					
Bezel Width	11.9	13.9	14.9	13.9	14.9	14.9	15.9	11.9	13.9	14.9	13.9	14.9	15.9	15.9	(T/L) 2.35 mm, (R/L) 1.25 mm	(T/L) 2.35 mm, (R/L) 1.2 mm	0.9mm (Even Bezel)	0.9mm (Even Bezel)	0.9mm (Even Bezel)						
Vesa Mount	100x100/200x200/M4	200x200/M6		400x400/M6			400x400/M8			600x400/M8			100x100/200x200/M4			200x200/M6	400x400/M6	400x400/M6	400x400 mm, M6	400x400 mm, M6					
Smart Insert Mount	N/A					"100x100 mm, 100x200 mm"					N/A					"100x100 mm, 100x200 mm"									
Weight (in KG)	5.31 kg	11.29 kg	12.75 kg	16.6 kg	27.80 kg	37.5 kg	49.5 kg	5.31 kg	11.29 kg	12.75 kg	16.6 kg	27.80 kg	37.5 kg	49.5 kg	21.6 kg	26.5 kg	24.35 kg	24.35 kg	24.35 kg						



## D-Line

\*3 year advanced exchange warranty

Model	32BDL4510D	43BDL4510D	50BDL4510D	55BDL4510D	65BDL4510D	75BDL4510D	86BDL4510D	32BDL4550D	43BDL4550D	50BDL4550D	55BDL4550D	65BDL4550D	75BDL4550D	86BDL4550D	98BDL4550D	
Screen Size	80 cm (32")	108 cm (42")	125.7 cm (50")	138.7 cm (55")	163.9 cm (65")	189.27 cm (75")	217.4 cm (86")	80 cm (32")	108 cm (42")	125.7 cm (50")	138.7 cm (55")	163.9 cm (65")	189.27 cm (75")	217.4 cm (86")	248.0 cm (98")	
Backlight Type	Direct LED															
Placement	Landscape 24/7, Portrait 24/7															
Resolution	1920x1080p	3840x2160p						1920x1080p	3840x2160p							
Panel Technology	VA	ADS	VA	ADS			VA	ADS	VA	ADS						
Contrast Ratio	4000:1	1200:1	4000:1	1300:1			4000:1	1200:1	4000:1	1300:1						
Dynamic Contrast Ratio	500,000:1															
Response Time	6.5 ms	8 ms	8 ms	9 ms	9 ms	8 ms	8 ms	6.5 ms	8 ms	8 ms	9 ms	9 ms	8 ms	8 ms	8 ms	
Viewing Angles	178/178 degree															
Display Colors	16.7 Million	1.07 Billion						16.7 Million	1.07 Billion							
Brightness	400 cd/m <sup>2</sup>	500 cd/m <sup>2</sup>						400 cd/m <sup>2</sup>	500 cd/m <sup>2</sup>							
Power Consumption (EPA)	40 W	70 W	80 W	145 W	150 W	185 W	350 W	43 W	88 W	118 W	128 W	157 W	165 W	324 W	TBD	
Video Input	DVI-I x 1, HDMI (x3), Display Port x 1,															
Video Output	Display Port, HDMI															
Audio Input	3.5 mm jack															
Audio Output	3.5 mm jack															
Internal Speaker	2 x 10 W RMS															
External Control	RJ45, RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack															
Extra Connections	RJ45, RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack															
Dimensions (WxHxD)	726.5x425.4x69.1	973.0x561.2x63.5	1128.4x649.0x63.5	1241.8x712.6x63.6	1462.3x837.3x68.9	1683.5x961.7x69.5	1929.0x1100.0x69.5	726.5x425.4x69.1	973.0x561.2x63.5	1128.4x649.0x63.5	1241.8x712.6x63.6	1462.3x837.3x68.9	1683.5x961.7x69.5	1929.0x1100.0x69.5	2193.2x1248.2x87.9	
Bezel Width	11.9	13.9	14.9	13.9	14.9	14.9	15.9	11.9	13.9	14.9	13.9	14.9	14.9	15.9	16	
Vesa Mount	100x100/200x200/M4	200x200/M6	400x400/M6	400x400/M6	400x400/M8	600x400/M8	600x400/M8	100x100/200x200/M4	200x200/M6	400x400/M6	400x400/M6	400x400/M8	600x400/M8	600x400/M8	800x400/M8	
Smart Insert Mount	N/A															
Weight (in KG)	5.31 kg	11.29 kg	12.75 kg	16.6 kg	27.80 kg	37.5 kg	49.5 kg	5.31 kg	11.29 kg	12.75 kg	16.6 kg	27.80 kg	37.5 kg	49.5 kg	90.6 kg	

\*3 year advanced exchange warranty



## P-Line



## T-Line



Model	43BDL3017P	50BDL3017P	55BDL3017P	65BDL3017P	10BDL4151T	32BDL3651T	43BDL3651T	43BDL3452T	55BDL3452T	65BDL3552T	75BDL3552T	86BDL3552T			
Screen Size	108 cm (42")	125.7 cm (50")	138.7 cm (55")	163.9 cm (65")	25.6 cm (10")	80 cm (32")	108 cm (42")	108 cm (42")	138.7 cm (55")	163.9 cm (65")	189.27 cm (75")	217.4 cm (86")			
Backlight Type	Direct LED				Edge-Lit LED		Direct LED								
Placement	Landscape 24/7, Portrait 24/7				Landscape & Portrait 24/7		Landscape & Portrait 18/7								
Resolution	3840x2160p				1280 x 800p	1920x1080p	3840x2160p			3840x2160p	3840x2160p	3840x2160p			
Panel Technology	IPS	VA	VA	IPS	VA	VA	IPS	IPS	IPS	IPS	IPS	IPS			
Contrast Ratio	1200:1	4000:1	5000:1	1200:1	800:1	4000:1	1200:1			1200:1					
Dynamic Contrast Ratio	500,000:1						500,000:1								
Response Time	8 ms				30 ms		8 ms								
Viewing Angles	178/178 degree				160/160 degree		178/178 degree								
Display Colors	1.07 Billion				262 Thousand		16.7 Million	1.07 Billion			1.07 Billion	1.07 Billion	1.07 Billion		
Brightness	750 cd/m <sup>2</sup>				300 cd/m <sup>2</sup>		350 cd/m <sup>2</sup>	400 cd/m <sup>2</sup>			420 cd/m <sup>2</sup>				
Protective Glass					0.7 mm safety glass		Anti-reflective   Anti-glare security glass								
Touch Technology					Pcap 5 touch points		Pcap 10 touch points			IR HID 20 touch points			HE-IR HID Multitouch		
Touch Points					5		10			20					
Power Consumption (EPA)	TBD				6 W		147 W						159 W	337 W	
Video Input	DVI-I x 1, HDMI (x2), Display Port x 1,				N/A		DVI-I x 1, HDMI (x4), USB, VGA						DVI, HDMI2.0 (x4), USB-C, DP		
Video Output	Display Port, HDMI				HDMI		N/A						HDMI		
Audio Input	3.5 mm jack				3.5mm Jack Mic input		Jack 3.5mm								
Audio Output	3.5 mm jack				3.5mm Jack stereo		Jack 3.5mm								
Internal Speaker	2 x 10 W RMS				2 x 2 W RMS		2 x 10 W RMS						2 x 20 W		
External Control	RJ45, RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack				RJ45 (PoE)		RJ45, IR (in/out) 3.5 mm jack, RS232C (in/out) 2.5 mm jack								
Extra Connections	SDM-L				2xUSB, Micro SD, mPCIe slot		USB 2.0			USB 2.0, OPS			USB 3.0, USB 2.0, OPS		
Dimensions (WxHxD)	972.98 x 561.22 x 76.80 mm	1128.44 x 649.01 x 76.80 mm	1241.80 x 712.60 x 76.80 mm	1462.3 x 837.3 x 89.8 mm	261x167.2x29 mm	24,4 mm	23,4 mm	16,3 mm	16,3 mm	1494.30x869.40x106.80 mm	1715.50x993.70 x108.70 mm	1961.00mmx1132.30x180.40 mm			
Bezel Width	(T/L/R/B) 13.90 mm				(L/R) 19.77 mm / (B/T) 13.56 mm		16,3 mm			(T/L/R/B) 16.3 mm					
Vesa Mount	400 x 400 mm, M6	400 x 400 mm, M6	400 x 400 mm, M6	400 x 400 mm, M6	75x75 mm, M4	200x200, M6			400x400, M6	400x400, M8	600x400, M8	600x400, M8			
Smart Insert Mount	N/A				N/A		N/A			*100x100 mm, 100x200 mm*					
Weight (in KG)	TBD				0.71 kg		TBD			43.6 kg			53.0 kg	71.0 kg	