

QUICK START GUIDE

WR-500

remote control

For use with Datavideo Teleprompter kits
TP-600, TP-500, TP-300 and TP-100



datavideo[®]
Sharing the Value

First use – Remote starts in Wired Mode

When first removed from the retail package the WR-500 remote is already in **wired mode**. When a button is pressed a **RED LED** will flash. The WR-500 can be switched to Bluetooth mode if required.

In wired mode, the remote needs to be physically cabled to the tablet it is controlling. A four pole jack to jack plug cable is provided with this remote.

One end of the cable fits into the tablet's headset socket. The other end plugs into the jack socket on the WR-500 remote.



NOTE: When using this remote in wired mode the **DV Prompter app** should also be set to **Wired** in the **Remote menu option**.

Bluetooth Mode – Pairing to your tablet device

Switch the **Bluetooth** function **ON** within the **tablet device settings**.

Open the DV Prompter app on the same tablet device and choose **Bluetooth** in the **Remote Control menu**.

Select and start the required script within the DV Prompter app.

To switch the remote into Bluetooth pairing mode press and hold the centre Play / Pause button for 3 to 4 seconds.

The **GREEN LED** will now blink on off repeatedly to indicate it is ready to pair with a Bluetooth device.

Once paired a Bluetooth icon will be shown in the bottom right hand corner of the app.



Note: The remote will sleep after 5 minutes of inactivity to save battery life. Press the play/pause button to wake the remote and it will automatically try to re-pair with the tablet previously used.

Service & Support

It is our goal to make your products ownership a satisfying experience. Our support staff can be contacted during normal office hours. They can assist you in setting up and understanding this product. Please refer to our web site www.datavideo.com for answers to common questions, support requests or contact your local Datavideo office below.

Datavideo Global Website: www.datavideo.com

Datavideo Corporation
USA

Tel: +1-562-696 2324
Fax: +1-562-698 6930
techsupport@datavideo.us

Datavideo Technologies
Europe

Tel: +31-30-261-96-56
Fax: +31-30-261-96-57
info@datavideo.nl

Datavideo UK Limited
UK

Tel: +44-1457 851 000
Fax: +44-1457 850 964
sales@datavideo.co.uk

Datavideo Technologies
Taiwan, R.O.C.

Tel: +886-2-8227-2888
Fax: +886-2-8227-2777
service@datavideo.com.tw

Datavideo Technologies
Shanghai, China

Tel: +86 21-5603 6599
Fax: +86 21-5603 6770
service@datavideo.cn

Datavideo Technologies
Singapore

Tel: +65-6749 6866
Fax: +65-6749 3266
sales@datavideo.sg

Datavideo Hong Kong Ltd
Hong Kong

Tel: +852-2833-1981
Fax: +852-2833-9916
info@datavideo.com.hk

Datavideo France s.a.r.l
France

Tel: +33-1-60370246
info@datavideo.fr

Datavideo Technologies
India

Tel: +91-01202427337
Fax: +91-01202427338
sales@datavideo.in

Please refer to our website for the latest PDF version of this manual

<http://www.datavideo.com/Teleprompters/WR-500>

All the trademarks are the properties of their respective owners.
Datavideo Technologies Co., Ltd. All rights reserved 2015.

Sept 2015 - P/N: WR-500 E1

Packing List

- 1 x **WR-500** Remote Control
- 1 x **Jack plug to jack plug cable** for wired mode
- 1 x **Lanyard necklace**



Overview

This **WR-500** remote control is designed to be used with Datavideo's teleprompter products, **DV Prompter** and **DVP-100**.

DV Prompter app is a FREE download from the Apple app store for iOS devices and also from Google Play for Android devices. **DVP-100** is a synchronised, multi tablet / camera, teleprompting product.

A separate manual is provided for DVP-100 and the DV Prompter app. For further details please visit our website www.datavideo.com

Connections and Controls

Button	Whilst scrolling text	Whilst text paused
+	Speed up text scroll	Previous Break Marker
—	Slow down text scroll	Next Break Marker
▶	Pause text	Play text
◀◀	Reduce font size	Load previous script
▶▶	Increase font size	Load next script

Jack plug socket for wired mode operation & lanyard necklace.

Lanyard necklace fitted to jack socket

LED indicators


RED LED = Wired mode

GREEN LED = Bluetooth 4



How to replace the internal CR2032 battery

A CR2032 button battery is fitted inside this remote. The original battery supplied (when new) is expected to last for 3 years under average / normal use.

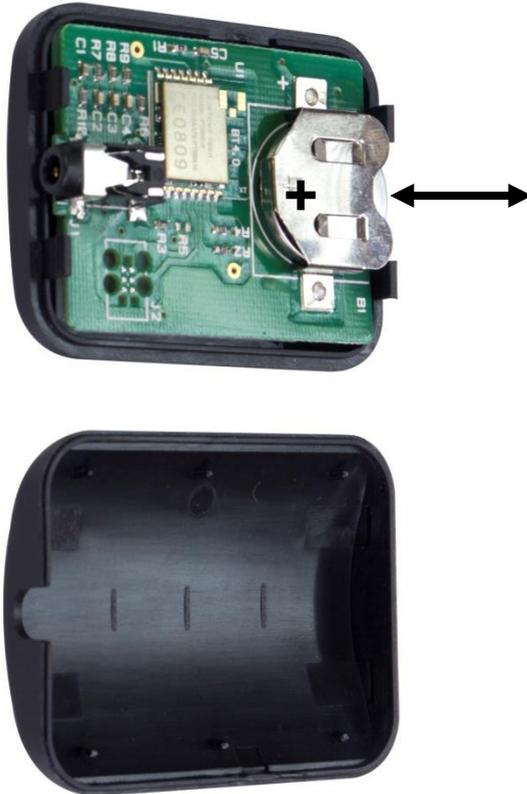

This button battery can be replaced by the user when it dies. **Please remove the case back carefully** to avoid user damage to the PCB or case. Then slide the old battery out.

Please ensure the new button battery is fitted with the positive (+) side of the cell matching the (+) sign on the PCB battery slot.

RESET – return the remote to wired mode

To return the WR-500 remote to wired mode from Bluetooth mode simply **press and hold the Play Pause button until the GREEN LED stops flashing** and becomes a steady GREEN light.

When the RED LED is shown on button presses the remote is in wired mode. If necessary switch the remote back to Bluetooth operation.

Frequently Asked Questions

Q1: Can the remote be used with Apple tablet and smart phone devices?

A1 : Yes, in wired or Bluetooth modes.

Q2: Can I replace the internal CR2032 battery?

A2: Yes, carefully open the remote and locate the battery slot on the PCB.

Q3: Can the remote be used with Android tablet and smart phone devices?

A3: It will work with most Android tablets and some smart phones. Check first if your device supports HID drivers or Bluetooth keyboards. If using wired mode check the mini jack socket supports microphone input.

Q4: Can the remote be used to control several devices at once?

A4: Yes, but only when using the DVP-100 product (extra purchase).

Q5: How do I switch the unit off?

A5: The device will automatically turn off after 30mins of being left idle.

Q6: Where can I find instructions for the free DV Prompter App?

A6: A separate PDF manual is available for download from our website www.datavideo.com

Q7: Will this remote work with other apps?

A7: The remote is designed for use with Datavideo products only. It may have limited or no compatibility in other, third party, applications.