


datavideo

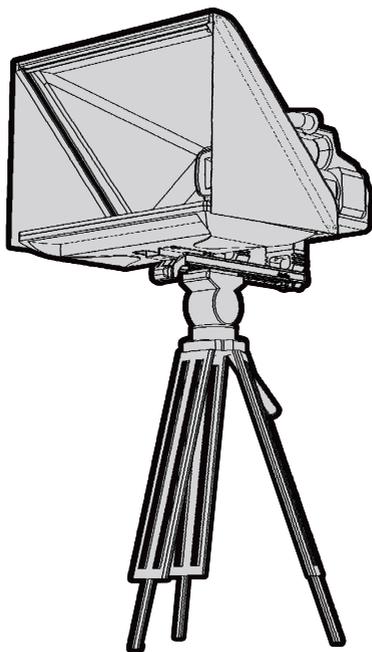

LOOK BACK KIT

LBK-1

Instruction Manual

www.datavideo.com

Table of Contents

FCC COMPLIANCE STATEMENT	3
WARNINGS AND PRECAUTIONS	3
WARRANTY	5
STANDARD WARRANTY.....	5
THREE YEAR WARRANTY.....	5
DISPOSAL	6
1. OVERVIEW	7
1.1 FEATURES	7
1.2 TALLY LED AND INPUT PHONE JACK.....	7
2. PARTS LIST AND LOOK BACK KIT EXPLODED VIEW	9
LOOK BACK KIT EXPLODED VIEW	10
LBK1-1-1 MAIN SUPPORT EXPLODED VIEW	11
LBK1-1-2 22" MONITOR AND LCD DISPLAY MOUNT	12
LBK1-1-3 22" GLASS FRAME MODULE AND HOOD SUPPORT WIRE.....	13
LBK1-2 EXPLODED VIEW OF MAIN SUPPORT, GLASS FRAME, LCD DISPLAY AND TRIPOD	14
LBK1-3 LOOK BACK KIT ASSEMBLY.....	15
3. DIMENSIONS.....	16
4. SPECIFICATIONS	17
SERVICE AND SUPPORT	18

Disclaimer of Product & Services

The information offered in this instruction manual is intended as a guide only. At all times, Datavideo Technologies will try to give correct, complete and suitable information. However, Datavideo Technologies cannot exclude that some information in this manual, from time to time, may not be correct or may be incomplete. This manual may contain typing errors, omissions or incorrect information. Datavideo Technologies always recommend that you double check the information in this document for accuracy before making any purchase decision or using the product. Datavideo Technologies is not responsible for any omissions or errors, or for any subsequent loss or damage caused by using the information contained within this manual. Further advice on the content of this manual or on the product can be obtained by contacting your local Datavideo Office or dealer.

FCC Compliance Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warnings and Precautions



1. Read all of these warnings and save them for later reference.
2. Follow all warnings and instructions marked on this unit.
3. Unplug this unit from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
4. Do not use this unit in or near water.
5. Do not place this unit on an unstable cart, stand, or table. The unit may fall, causing serious damage.
6. Slots and openings on the cabinet top, back, and bottom are provided for ventilation. To ensure safe and reliable operation of this unit, and to protect it from overheating, do not block or cover these openings. Do not place this unit on a bed, sofa, rug, or similar surface, as the ventilation openings on the bottom of the cabinet will be blocked. This unit should never be placed near or over a heat register or radiator. This unit should not be placed in a built-in installation unless proper ventilation is provided.
7. This product should only be operated from the type of power source indicated on the marking label of the AC adapter. If you are not sure of the type of power available, consult your Datavideo dealer or your local power company.
8. Do not allow anything to rest on the power cord. Do not locate this unit where the power cord will be walked on, rolled over, or otherwise stressed.
9. If an extension cord must be used with this unit, make sure that the total of the ampere ratings on the products plugged into the extension cord do not exceed the extension cord rating.
10. Make sure that the total amperes of all the units that are plugged into a single wall outlet do not exceed 15 amperes.
11. Never push objects of any kind into this unit through the cabinet ventilation slots, as they may touch dangerous voltage points or short out parts that could result in risk of fire or electric shock. Never spill liquid of any kind onto or into this unit.
12. Except as specifically explained elsewhere in this manual, do not attempt to service this product yourself. Opening or removing covers that are marked “Do

Not Remove” may expose you to dangerous voltage points or other risks, and will void your warranty. Refer all service issues to qualified service personnel.

13. Unplug this product from the wall outlet and refer to qualified service personnel under the following conditions:
 - a. When the power cord is damaged or frayed;
 - b. When liquid has spilled into the unit;
 - c. When the product has been exposed to rain or water;
 - d. When the product does not operate normally under normal operating conditions. Adjust only those controls that are covered by the operating instructions in this manual; improper adjustment of other controls may result in damage to the unit and may often require extensive work by a qualified technician to restore the unit to normal operation;
 - e. When the product has been dropped or the cabinet has been damaged;
 - f. When the product exhibits a distinct change in performance, indicating a need for service.

Warranty

Standard Warranty


- Datavideo equipment are guaranteed against any manufacturing defects for one year from the date of purchase.
- The original purchase invoice or other documentary evidence should be supplied at the time of any request for repair under warranty.
- The product warranty period begins on the purchase date. If the purchase date is unknown, the product warranty period begins on the thirtieth day after shipment from a Datavideo office.
- Damage caused by accident, misuse, unauthorized repairs, sand, grit or water is not covered under warranty.
- Viruses and malware infections on the computer systems are not covered under warranty.
- Any errors that are caused by unauthorized third-party software installations, which are not required by our computer systems, are not covered under warranty.
- All mail or transportation costs including insurance are at the expense of the owner.
- All other claims of any nature are not covered.
- Cables and batteries are not covered under warranty.
- Warranty only valid in the country or region of purchase.
- Your statutory rights are not affected.

Three Year Warranty

- All Datavideo products purchased after July 1st, 2017 are qualified for a free two years extension to the standard warranty, providing the product is registered with Datavideo within 30 days of purchase.
- Certain parts with limited lifetime expectancy such as LCD panels, DVD drives, Hard Drive, Solid State Drive, SD Card, USB Thumb Drive, Lighting, Camera module, PCIe Card are covered for 1 year.
- The three-year warranty must be registered on Datavideo's official website or with your local Datavideo office or one of its authorized distributors within 30 days of purchase.



Disposal



For EU Customers only - WEEE Marking

This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product.



CE Marking is the symbol as shown on the left of this page. The letters "CE" are the abbreviation of French phrase "Conformité Européene" which literally means "European Conformity". The term initially used was "EC Mark" and it was officially replaced by "CE Marking" in the Directive 93/68/EEC in 1993. "CE Marking" is now used in all EU official documents.


1. Overview


The LBK-1 Look Back Kit can be used in any Camera Setup. The kit contains a look back mirror, which allows the user or talent to view his/her mirrored image reflected off from a 22" monitor connected to the Virtual Interactive Board System (MS-VGB1K). Hence, the LBK- 1 can be used as a part of total VGB-1000F or VGB-1000R solution by mounting it to the tripod mount quick release system.

1.1 Features

- Allows mounting of a 22" monitor with 16:9 aspect ratio and four 100x100mm VESA mount holes (MIS-D/100/C), for example ACER KA220HQ.
- Large sized mirror installed with a green sticker facing outward.
- Large hood to cover 2 sides of the mirror.
- Red Tally Light
- Adjustable camera mount dock

1.2 Tally LED and Input Phone Jack

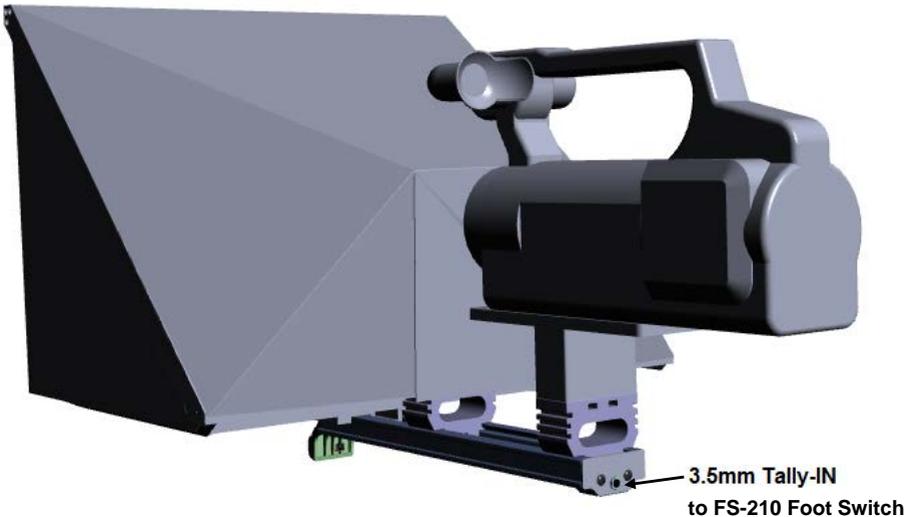

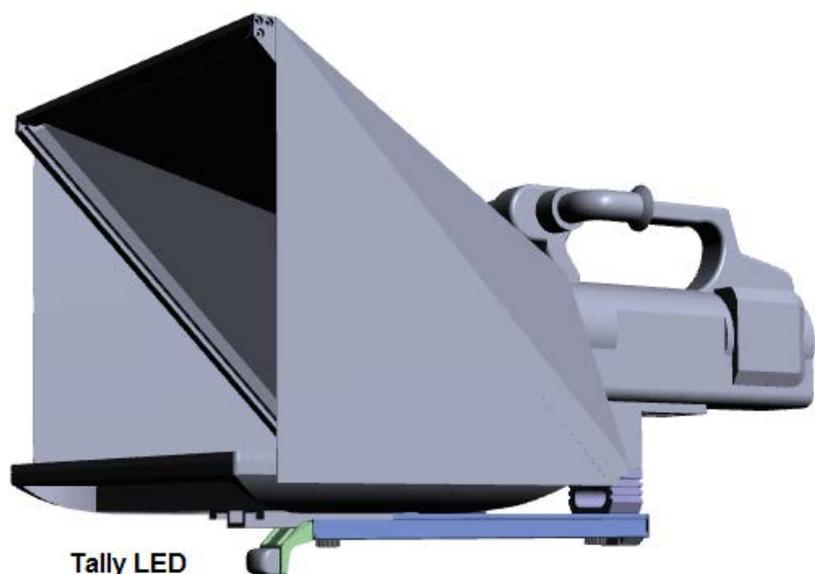


Tally LED

2. Parts List and Look Back Kit Exploded View


Parts List		
Label	Name	Quantity
A	Main Support Rail	1
B	Spacer Block	2
C	Screw (Wing Nut 1/4 20UNC 12.5mm Nickel Plated)	4
D	Screw (Pan-Head 1/4" 20UNC 12mm Nickel Plated)	2
E	Riser Block	1
F	Screw (1/4" 20UNC Hex Head 31mm)	4
G	Camera Dock Module	1
H	1/4 20UNC Screw	1
I	Anti-Collision Rubber Strip	2
J	Glass Sheet	1
K	Glass Frame Module	1
L	Hood Support Wire	1
M	LCD Mounting Bracket	1
N	Nyloc Screw (ISO Counter Sunk M4*8m/m Black (RoHS))	4
O	Cloth Snood/Hood	1
P	Hex Tool 4mm	1
Q	Hex Tool 3mm	1

Look Back Kit Exploded View


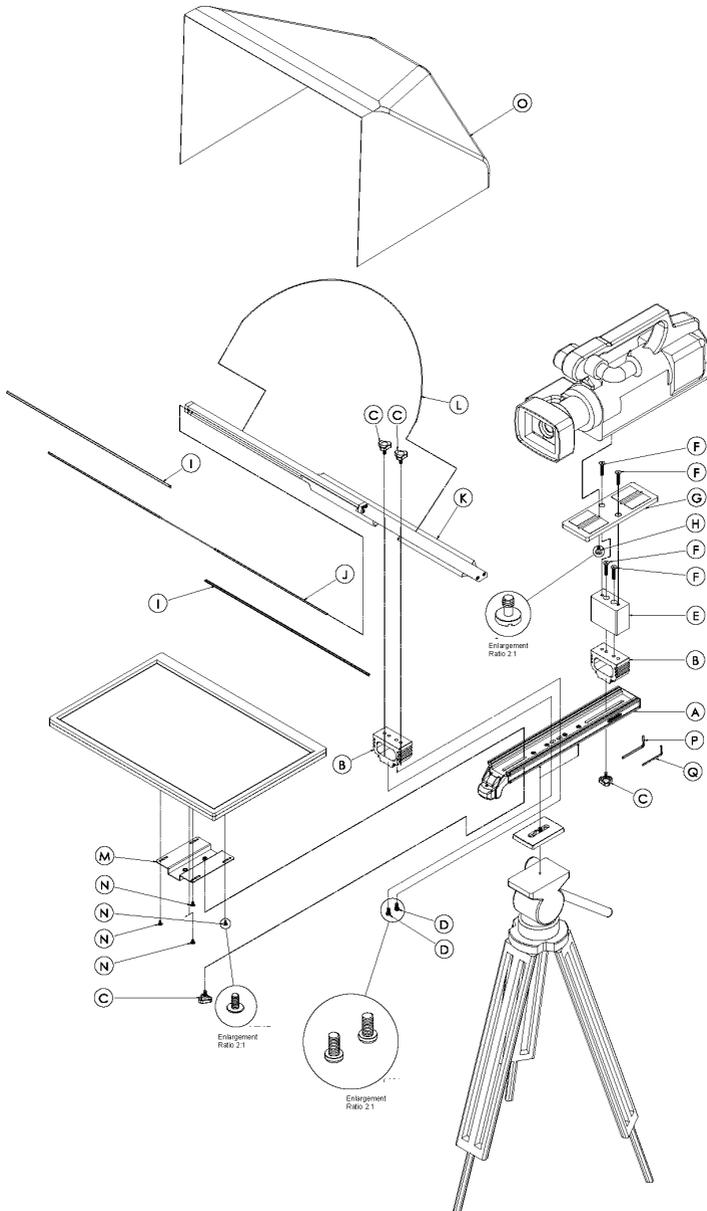


LBK1-1-1

Main Support Exploded View


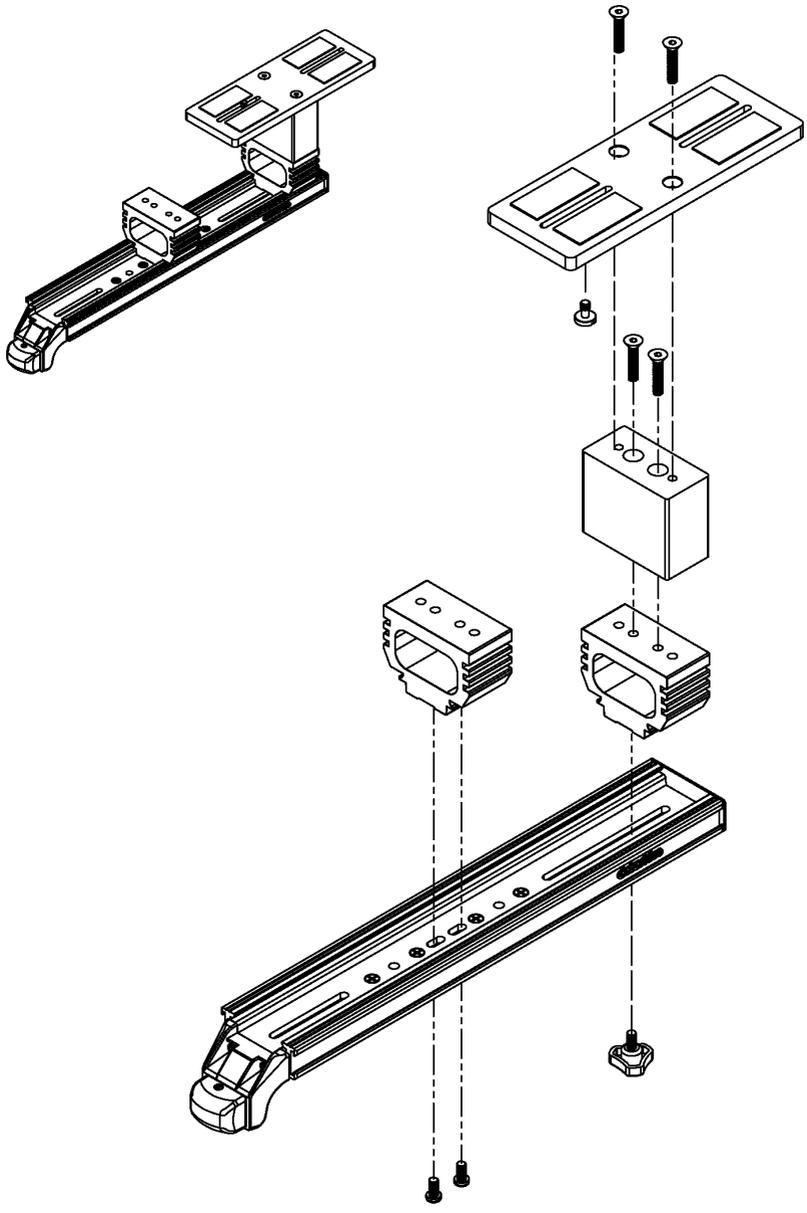


LBK1-1-2 22" Monitor and LCD Display Mount

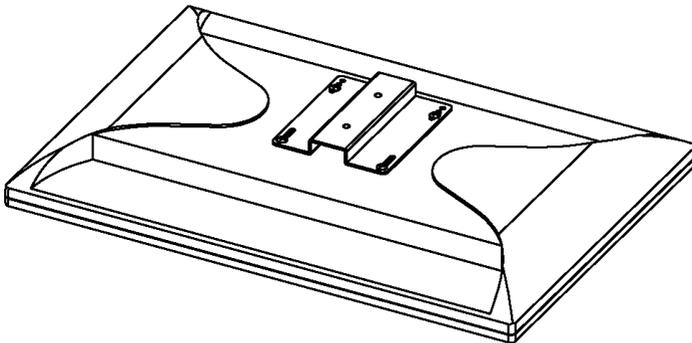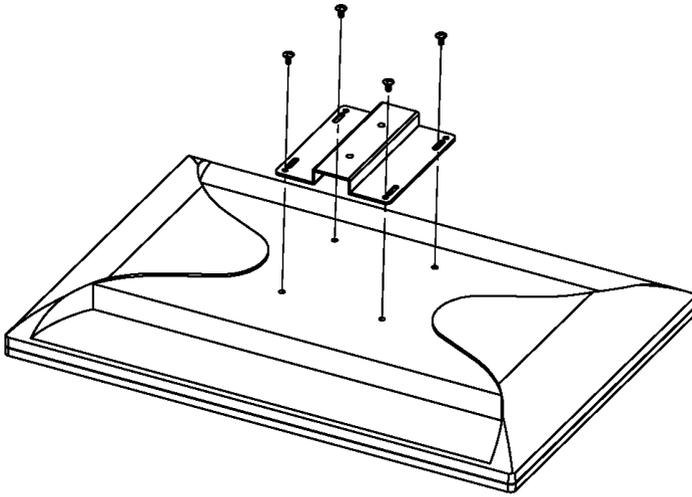


LBK1-1-3


22" Glass Frame Module and Hood Support Wire

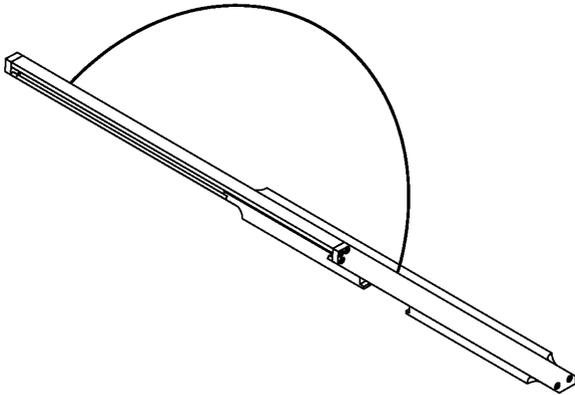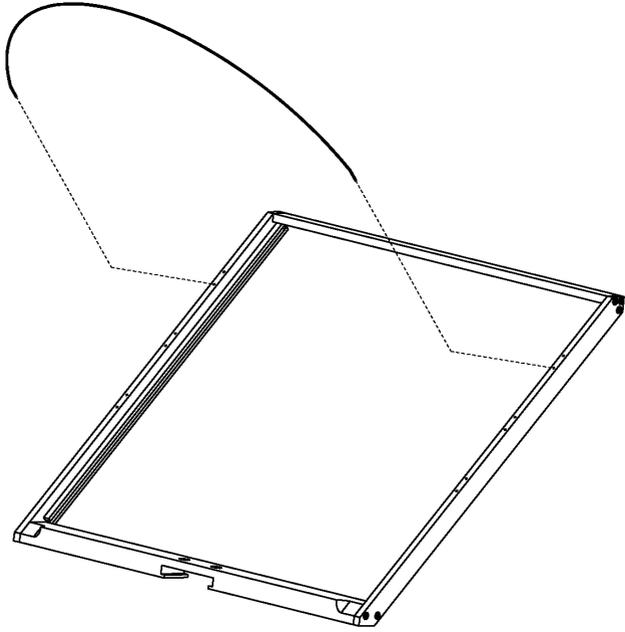

LBK1-2 Exploded view of Main Support, Glass Frame, LCD Display and Tripod




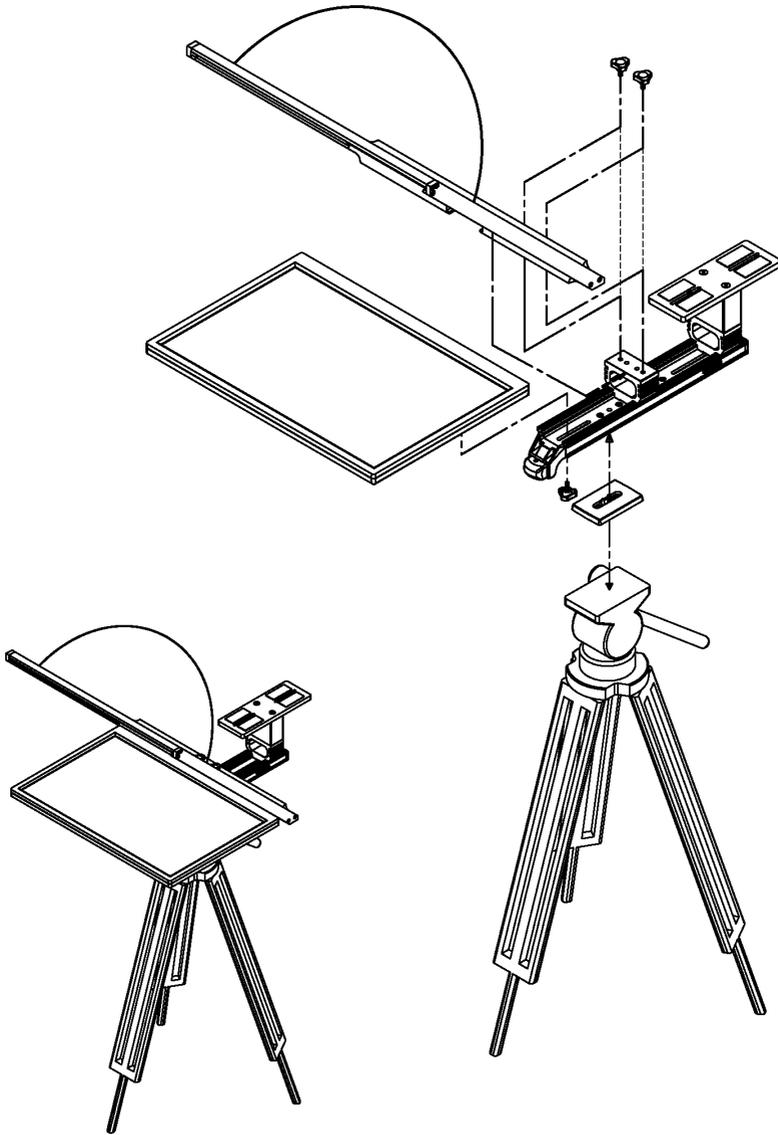


LBK1-3 Look Back Kit Assembly

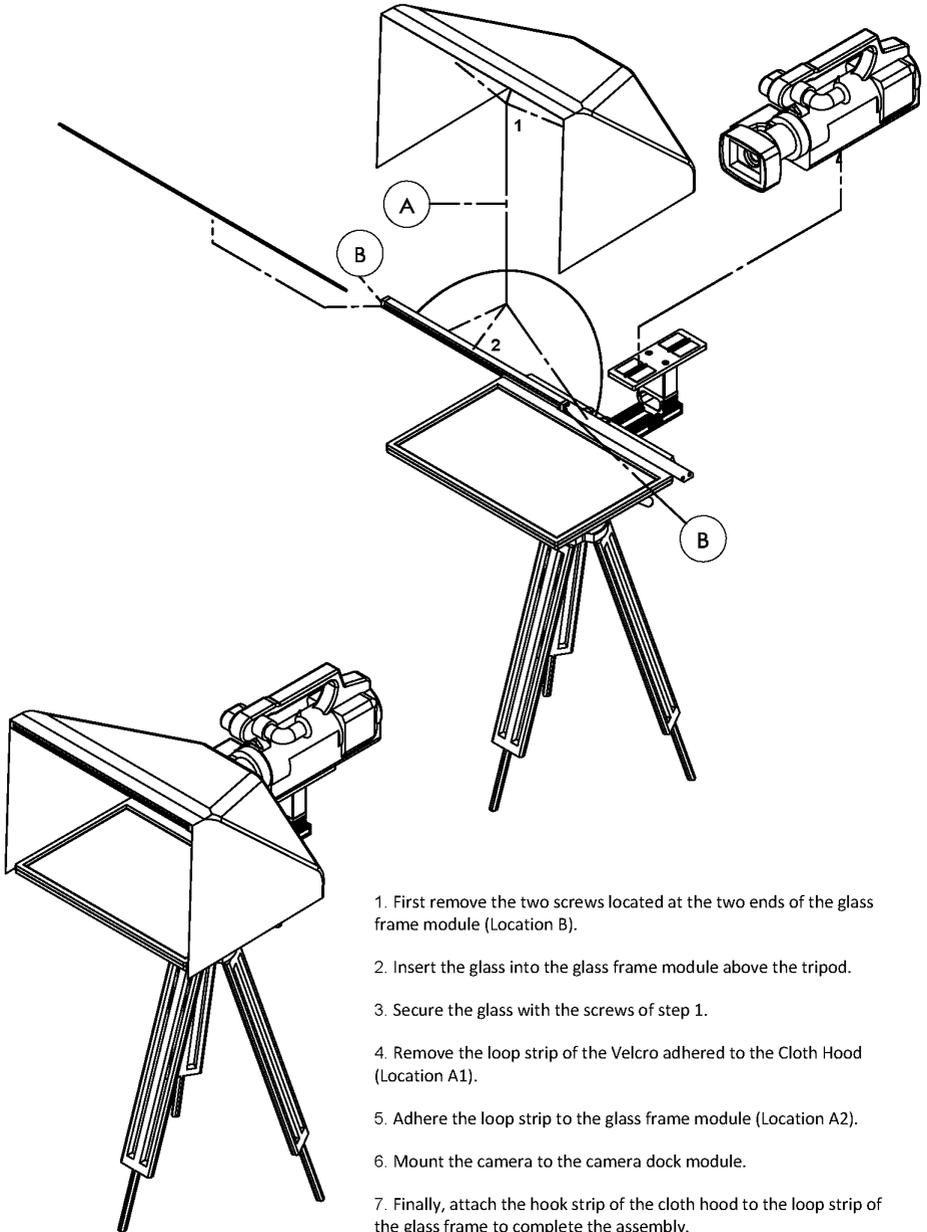

1. First remove the two screws located at the two ends of the glass frame module (Location B).
2. Insert the glass into the glass frame module above the tripod.
3. Secure the glass with the screws of step 1.
4. Remove the loop strip of the Velcro adhered to the Cloth Hood (Location A1).
5. Adhere the loop strip to the glass frame module (Location A2).
6. Mount the camera to the camera dock module.
7. Finally, attach the hook strip of the cloth hood to the loop strip of the glass frame to complete the assembly.

3. Dimensions

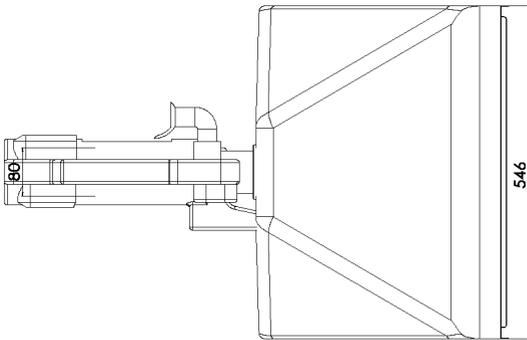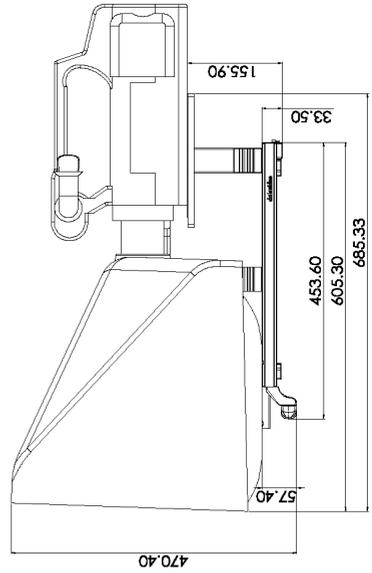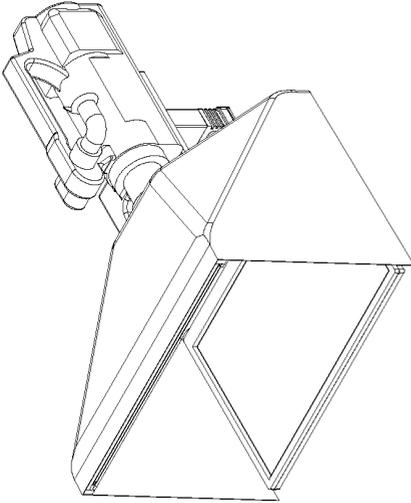

4. Specifications

Tally Light	
Color	Red
Number	1
Input Interface	3.5mm Phone Jack
Dimensions	
Length	685.33 mm
Width	546 mm
Height	470.4 mm
Product Weight	Approximately 5 Kg
Remarks	Not inclusive of Monitor, Camera, Tripod and Quick Release Plate

Note A: Camera and tripod are not included. Please make sure the tripod is able to sustain 10 Kg load (camera included) or 7 Kg load (camera not included).

Note B: 22" 16:9 ratio PC monitor and the related cables/converters are not included. Please use a monitor with VESA mount screw holes located at four corners of a 100x100 mm rectangle on the back. The monitor should also be equipped with an HDMI input. If DVI Monitor is used, please make sure the monitor includes a DVI-D/DVI-I input, and an external HDMI to DVI-D converter/cable (Male to Male) which converts an HDMI source (MS-VGB1K) to DVI-D (18+1 pin single link or 24+1 pin dual link depending on the Monitor).

Example of a 22" 16:9 Monitor is Acer KA220HQ (Ref. Price: US\$140)

Notes

Notes

Service & Support

It is our goal to make your products ownership a satisfying experience. Our supporting staff is available to assist you in setting up and operating your system. Please refer to our web site www.datavideo.com for answers to common questions, support requests or contact your local office below.



Please visit our website for latest manual update.
www.datavideo.com/product/LBK-1

datavideo
www.datavideo.com



@DatavideoUSA @DatavideoIndia2016
@DatavideoEMEA @Datavideojapan
@DatavideoTaiwan @DatavideoLatam
@DatavideoAsia @DatavideoBrasil



@Datavideo
@Datavideo_EMEA
@Datavideo_Taiwan



@DatavideoUSA
@DVTWDVCN



@DatavideoUSA
@DatavideoEurope

All the trademarks are the properties of their respective owners.
Datavideo Technologies Co., Ltd. All rights reserved 2020