


datavideo

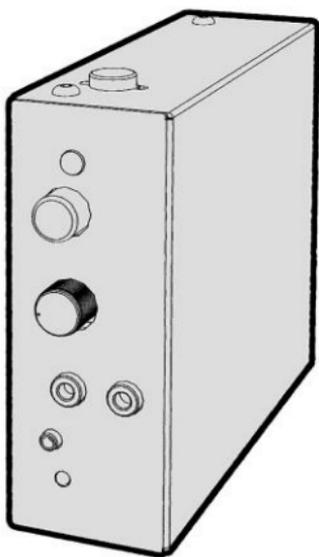

**INTERCOM BELT PACK
ITC-100SL**

Instruction Manual

www.datavideo.com

Warranty

Standard Warranty

- ◆ Datavideo equipment is guaranteed against any manufacturing defects for one year from the date of purchase.
- ◆ The original purchase invoice or other documentary evidence should be supplied at the time of any request for repair under warranty.
- ◆ Damage caused by accident, misuse, unauthorized repairs, sand, grit or water is not covered by this warranty.
- ◆ All mail or transportation costs including insurance are at the expense of the owner.
- ◆ All other claims of any nature are not covered.
- ◆ Cables & batteries are not covered under warranty.
- ◆ Warranty only valid within the country or region of purchase.
- ◆ Your statutory rights are not affected.

Two Year Warranty

- ◆ All Datavideo products purchased after 01-Oct.-2008 qualify for a free one year extension to the standard Warranty, providing the product is registered with Datavideo within 30 days of purchase. For information on how to register please visit www.datavideo-tek.com or contact your local Datavideo office or authorized Distributors
- ◆ Certain parts with limited lifetime expectancy such as LCD Panels, DVD Drives, Hard Drives are only covered for the first 10,000 hours, or 1 year (whichever comes first).

Any second year warranty claims must be made to your local Datavideo office or one of its authorized Distributors before the extended warranty expires.

Disposal




For EU Customers only - WEEE Marking

This symbol on the product indicates that it will not be treated as household waste. It must be handed over to the applicable take back scheme for the recycling of electrical and electronic equipment. For more detailed information about the recycling of this product, please contact your local Datavideo office.

Packing List

- 1 x TD-2 / TD-3 Tally Light
- 1 x MC-1 Headset / Microphone
- 1 x ITC-100SL Slave Unit
- 1 x 20m XLR to XLR Intercom Cable
- 1 x GPI cable
- 1 x 36cm Black Velcro
- 1 x 3.5Ø Earphone (M) to two Earphone (F) L: 17cm)
- 1 x ITC-100SL Carrying Case
- 1 x 5*30 cm Velcro
- 1 x Instruction Manual

ITC-100SL Slave Unit

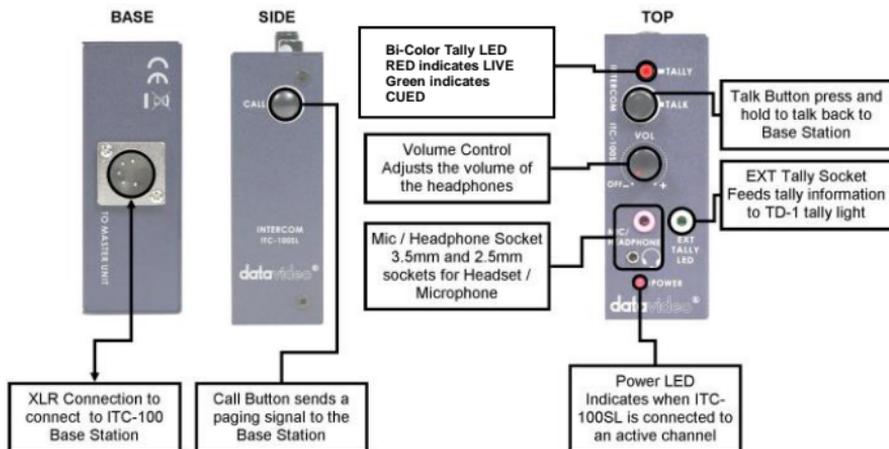

XLR Connection

Connects the ITC-100SL to the ITC-100 Base Station. Power, tally and bi-directional audio are all carried through the same cable.



Call Button

Sends a paging message to the ITC-100 Base Station. The channel button will flash orange and there will be an audible tone, each time the button is pressed.



Bi-Color Tally LED

Will illuminate RED when the channel is LIVE

Green color means the channel is CUED



Talk Button

Opens up talk back communication with the ITC-100 base station, and any other active channels. Press to activate; release to de-activate. ***PLEASE NOTE: It is important to deactivate the talk channel as soon as you have finished talking, otherwise it will remain an open channel and become distracting and confusing for other members of the crew.***



Volume Control

Adjusts the volume of the headphones.



Mic / Headphone Socket

The ITC-100SL has both a 3.5mm and 2.5mm Mic / Headset socket. A standard 3.5mm Mic / Headset can be used, or a Motorola type 2.5mm Mic / headset could be used if preferred.



External Tally LED Socket

An external tally display (TD-2) can be connected to the ITC-100SL. This enables the tally light to be positioned in a more convenient place, such as on top of the camera. When the channel is LIVE the LED will be RED, and when the channel is CUED the LED will be AMBER.

N.B. The Tally LED on the ITC-100SL will continue to operate as normal when a TD-2 has been added.



Power LED

The Power LED indicates when the channel is active. If the operator has opened the channel by pressing the channel button 1 ~ 8, or by pressing ALL then the LED will light up.

N.B. The tally indicator lights will continue to work even when the Power LED is not on, and the channel is not active.

Specification

INPUT	5 Pin XLR Connector
MIC / HEADSET SOCKET	3.5mm Stereo Jack Socket for combination Headphone / Microphone Headset Impedance 8~600 ohms 100mW(min) Microphone Level -67dB Or 2.5mm Stereo Jack Socket, for Motorola Mobile Phone type headset / microphone
FREQUENCY RESPONSE	550-3.6KHz, < +/-3dB
THD	< 3%
S/N	50dB
TALLY OUT SOCKET	3.5mm Jack Socket to connect to TD-2 or TD-3 Tally Indicator
TALLY LED	Bi-Color LED – RED indicates LIVE / GREEN Indicates CUED
POWER LED	Illuminates to indicate that power is being received
OPERATING RANGE	Up to 200m between Base Station and Slave
OPERATING TEMP. RANGE	5 ~ 45°C
DIMENSION	114mm x 97mm x 35mm
WEIGHT	348g

Service & Support

It is our goal to make owning and using Datavideo products a satisfying experience. Our support staff is available to assist you to set up and operate your system. Contact your local office for specific support requests. Plus, please visit www.datavideo.com to access our FAQ section.

Datavideo Taiwan

Datavideo Technologies Co. Ltd
10F, No. 176, Jian 1st Rd., Chung Ho
District, New Taipei City 235, Taiwan,
R. O. C.
Tel: +886-2-8227-2888
Fax: +886-2-8227-2777
E-mail: service@datavideo.com.tw

Datavideo USA

Datavideo Corporation
7048 Elmer Avenue.
Whittier, CA 90602,
U.S.A.
Tel: +1-562-696 2324
Fax: +1-562-698 6930
E-mail: sales@datavideo.us

Datavideo Hong Kong

Datavideo Hong Kong Ltd
G/F., 26 Cross Lane
Wanchai, Hong Kong
Tel: +852-2833-1981
Fax: +852-2833-9916
E-mail: info@datavideo.com.hk

Datavideo Europe

Datavideo Technologies Europe BV
Floridareef 106
3565 AM Utrecht,
The Netherlands
Tel: +31-30-261-96-56
Fax: +31-30-261-96-57
E-mail: info@datavideo.nl

Datavideo China

Datavideo Technologies China Co
101, NO. 618, LiuYing Rd, Zhabei District,
Shanghai, China
Tel: +86 21-5603 6599
Fax: +86 21-5603 6770
E-mail: service@datavideo.cn

Datavideo France

Datavideo France s.a.r.l
Cit  Descartes 1, rue Albert Einstein
Champs sur Marne
774477-Marne la Vall e cedex 2
Tel: +33-1-60370246
E-mail: info@datavideo.fr

Datavideo United Kingdom

Datavideo UK Limited
Units 1 & 2 Waterside Business Park
Hadfield, Glossop, Derbyshire
SK13 1BE, UK
Tel: +44-1457 851 000
Fax: +44-1457 850 964
E-mail: sales@datavideo.co.uk

Datavideo Singapore

Datavideo Technologies (S) PTE Ltd
No. 178 Paya Lebar Road #06-03
Singapore 409030
Tel: +65-6749 6866
Fax: +65-6749 3266
E-mail: sales@datavideo.sg

Datavideo India

Datavideo Technologies India Pvt L
A-132, Sec-63, Noida-201307,
Uttar Pradesh (UP), India.
Tel: +91-0120-2427337
Fax: +91-0120-2427338
E-mail: sales@datavideo.in



Please refer to our website for update the latest version manual.

www.datavideo.com/Intercom+Systems/ITC-100SL

datavideo
www.datavideo.com

All the trademarks are the properties of their respective owners.
Datavideo Technologies Co., Ltd. All rights reserved 2018

Jun-22-2015 P/N: G082061402E7